




Pnömatik Fan

Пневматический Вентилятор


Yüksek basınç ve düşük/orta derecede akış değerleri bulunan bir ortamda tane veya toz halindeki malzemenin taşınmasında kullanılır.

Он используется для транспортировки гранулированного или порошкообразного материала в среде с высоким давлением и низким/средним расходом.

Sağ Yön
Right Direction

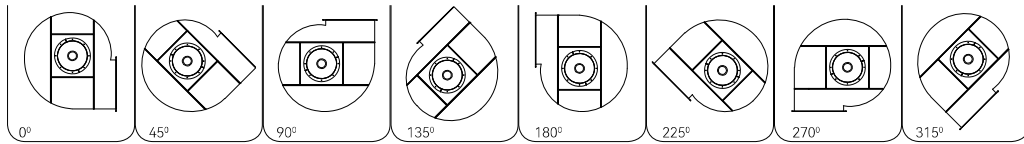

Sol Yön
Left Direction

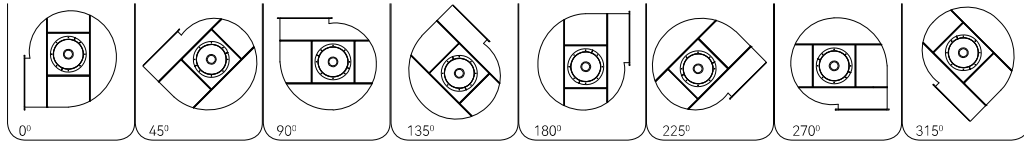

Model	Motor		ОБЩЕЕ ДАВЛЕНИЕ TOPLAM BASINÇ	1110	1120	1130	1140	1150	1160	1170	1180	1190	1200	1210	1220	1230	1240	1250	1260	1270
	kw	rpm																		
TMTF-22	22	3000	Рабочая температура окружающей среды Ortam Çalışma Sıcaklığı	4.245	4.208	4.170	4.134	4.098	4.062	4.028	3.994	3.960	3.927	3.895	3.863	3.831	3.800	3.770	3.740	3.711
TMTF-30	30			5.789	5.736	5.687	5.637	5.588	5.540	5.492	5.446	5.400	5.355	5.311	5.267	5.224	5.182	5.141	5.100	5.060
TMTF-37	37			7.140	7.076	7.014	6.952	6.892	6.832	6.774	6.716	6.660	6.605	6.550	6.496	6.443	6.391	6.340	6.290	6.240
TMTF-45	45			8.684	8.606	8.530	8.455	8.382	8.309	8.238	8.169	8.100	8.033	7.966	7.901	7.837	7.773	7.711	7.650	7.590
TMTF-55	55			10.614	10.519	10.426	10.334	10.244	10.156	10.069	9.984	9.900	9.818	9.736	9.657	9.578	9.507	11.431	9.350	9.276
TMTF-75	75			14.473	14.344	14.217	14.092	13.970	13.849	13.731	13.614	13.500	13.388	13.277	13.168	13.061	12.956	15.242	12.750	12.650
TMTF-90	90			17.368	17.213	17.060	16.911	16.763	16.619	16.477	16.337	16.200	16.065	15.932	15.802	15.673	15.547	19.052	15.300	15.180
TMTF-110	110			21.227	21.038	20.851	20.668	20.489	20.312	20.138	19.968	19.800	19.635	19.473	19.313	19.156	19.002	19.052	18.700	18.553
TMTF-132	132			25.472	25.245	25.022	24.802	24.586	24.374	24.166	23.961	23.760	23.562	23.367	23.176	22.987	22.802	19.052	22.440	22.263
TMTF-160	160			30.876	30.600	30.329	30.063	29.802	29.545	29.292	29.044	28.800	28.560	28.324	28.092	27.863	27.639	27.418	27.200	26.986