

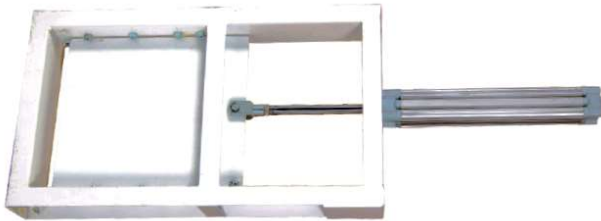



Pneumatic Valve

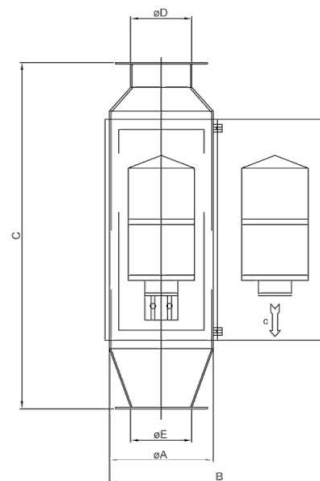

Pneumatic Valve is utilized to halt or redirect the movement of unconfined raw materials or products at a specific point or location

Box Magnet



Model	Dimension (mm)					Technical Specifications		
	øA	B	C	D	E	Weight kg		Packing Volume m ³
						Net	Gross	
TMBM-120	200	405	600	120	120	5	6	0,12
TMBM-150	240	480	640	150	150	12	15	0,2
TMBM-170	260	520	680	170	170	21	24	0,27
TMBM-200	300	610	720	200	200	28	32	0,31

This equipment is commonly utilized in grain processing and storage facilities to separate screws, pins, bolts, and other foreign objects mixed within the product. Its purpose is to prevent damage to subsequent machines in the processing line. Also, this equipment is compact and attached to the entrance of the machine.