

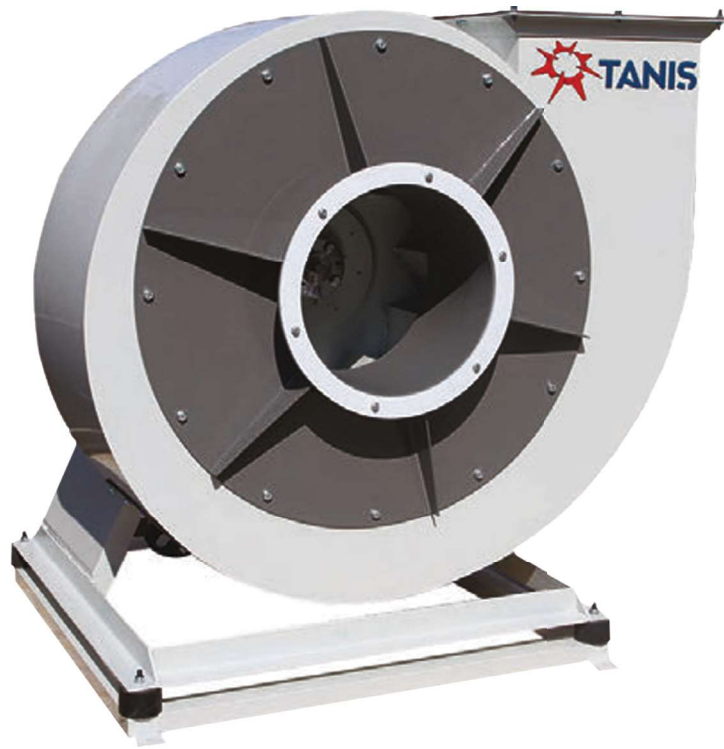






Dust Aspirator

A low fan is a versatile tool used for the aspiration of various machinery groups in flour mills and for purifiers. It boasts high quality, efficiency, and extraction, ensuring maximum hygiene and security in milling operations. With a long life and low periodic maintenance needs, it offers excellent efficiency and low energy consumption. Its noise-free, vibration-free running makes for a comfortable work environment, and its aerodynamic and sturdy structure ensures reliability and longevity. The low fan is an essential component for any flour mill looking to optimize its milling processes.



Model	Motor		Total Pressure (mmWC)		150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300
	kw	rpm																		
TMTF-4	4	15	Рабочая температура Амбиенте Ortam Çalışma Sıcaklığı 20 °C	Поток Debi Q=m3/h	6.930	6.497	6.115	5.775	5.471	5.198	4.950	4.725	4.520	4.331	4.158	3.998	3.850	3.713	3.584	3.465
TMTF-5,5	5.5				9.450	8.859	8.338	7.875	7.461	7.088	6.750	6.443	6.163	5.906	5.670	5.452	5.250	5.063	4.888	4.725
TMTF-7,5	7.5				12.600	11.813	11.118	10.500	9.947	9.450	9.000	8.591	8.217	7.875	7.560	7.269	7.000	6.750	6.517	6.300
TMTF-11	11				18.900	17.719	16.676	15.750	14.921	14.175	13.500	12.886	12.326	11.813	11.340	10.904	10.500	10.125	9.776	9.450
TMTF-15	15				25.200	23.625	22.235	21.000	19.895	18.900	18.000	17.182	16.435	15.750	15.120	14.538	14.000	13.500	13.034	12.600
TMTF-18,5	18.5				31.500	29.531	27.794	26.250	24.868	23.625	22.500	21.477	20.543	19.688	18.900	18.173	17.500	16.875	16.293	15.750
TMTF-22	22				37.800	35.438	33.353	31.500	29.842	28.350	27.000	25.773	24.652	23.625	22.680	21.808	21.000	20.250	19.552	18.900
TMTF-30	30				50.400	47.250	44.471	42.000	39.789	37.800	36.000	34.364	32.870	31.500	30.240	29.077	28.000	27.000	26.069	25.200
TMTF-37	37				63.000	59.063	55.588	52.500	49.737	47.250	45.000	42.955	41.087	39.375	37.800	36.346	35.000	33.750	32.586	31.500