




## Triangle Destoner

The Triangle Destoner is a highly effective cleaning tool that separates same-length but different density stones and impurities from grains. It pre-cleans and sensitively cleans materials like wheat, seeds, and pulses by separating heavier materials like stones, foreign seeds, earth, and glass. The machine is compatible with all types of wheat, seed, and pulse products, and its high vacuum feature can remove light impurities and dust. It offers effective cleaning, vibration-free operation, automatic control, durability, and long-life vibration-absorbent special shoes.

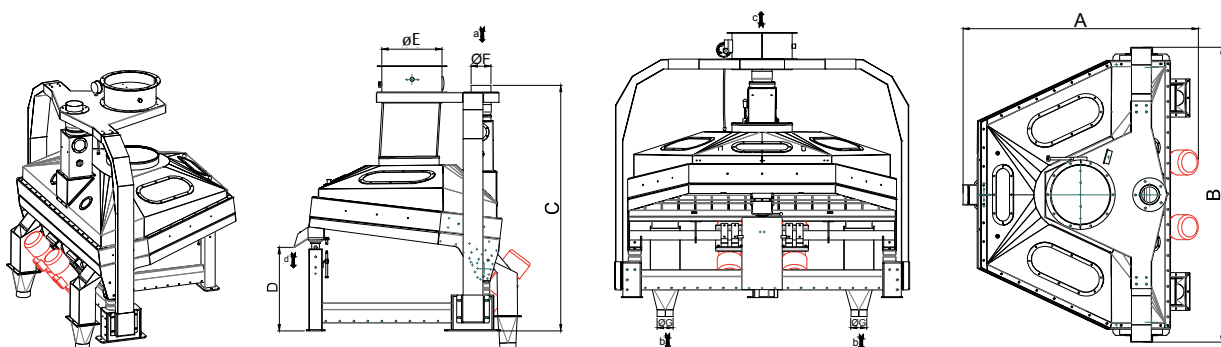

| Model    | Dimension (mm) |      |      |     |     |     |     | Technical Specifications |                             |             |              |       |                    |
|----------|----------------|------|------|-----|-----|-----|-----|--------------------------|-----------------------------|-------------|--------------|-------|--------------------|
|          | A              | B    | C    | D   | øE  | øF  | øG  | Capacity<br>t/h          | Air Requirement<br>m³/ min. | Motor<br>kw | Weight<br>kg |       | Gross Volume<br>m³ |
|          |                |      |      |     |     |     |     |                          |                             |             | Net          | Gross |                    |
| TMTA-50  | 1750           | 760  | 1720 | 850 | 250 | 100 | 100 | 3,5                      | 40                          | 2x0,18      | 210          | 275   | 3,2                |
| TMTA-100 |                | 1600 |      |     | 350 | 120 | 120 | 8-10                     | 80                          | 2x0,35      | 275          | 370   | 5,5                |
| TMTA-150 |                | 2220 |      |     | 450 | 150 | 150 | 12-15                    | 120                         | 2x0,35      | 400          | 500   | 6,8                |